

OSID-DE

OPEN-AREA SMOKE IMAGING DETECTION



LARGE, OPEN SPACES – WAREHOUSES, AIRPORTS, TRAIN STATIONS, STADIUMS AND SHOPPING MALLS – POSE UNIQUE CHALLENGES TO RELIABLE FIRE DETECTION DUE TO THEIR ENVIRONMENTAL NATURE AND LIMITATIONS.

OPEN-AREA SMOKE DETECTION REINVENTED



OSID-DE is designed specifically for these environments, enabling early detection and response to save lives and prevent service disruptions.

OSID-DE uses a sophisticated algorithm to map and compare the strength of infrared (IR) and ultraviolet (UV) light signals from detectors configured in the area.


OSID-DE also reduces the costs of installation thanks the ball and socket arrangement with simple laser screwdriver alignment. The Emitters come both battery powered and wired.

SUPERIOR FEATURES OFFERED BY OSID-DE

- Patented dual wavelength, UV & IR, particle detection
- CMOS imager with wide viewing angles
- Simple installation, commissioning and maintenance - up to 70% time saving compared to traditional beams
- High tolerance to vibration and structural movement and high airflow
- High resistance to dust, fogging, steam, reflections and object intrusion
- High resistance to reflected sunlight
- Requires as little as 20 x 20 cm (8x8") unobstructed width of view
- On-board log memory for fault and alarm diagnostics
- Software tool for diagnostic purposes
- Aesthetically discreet and 3D coverage
- Long range up to 150 m (492 ft)

OSID-DE CONFIGURATIONS

OSID-DE systems may be configured to protect a range of spaces, regardless of shape. The protection zone or "fire web" is determined by the placement of OSID-DE detectors. Multi-emitter solutions provide a true 3D arrangement.

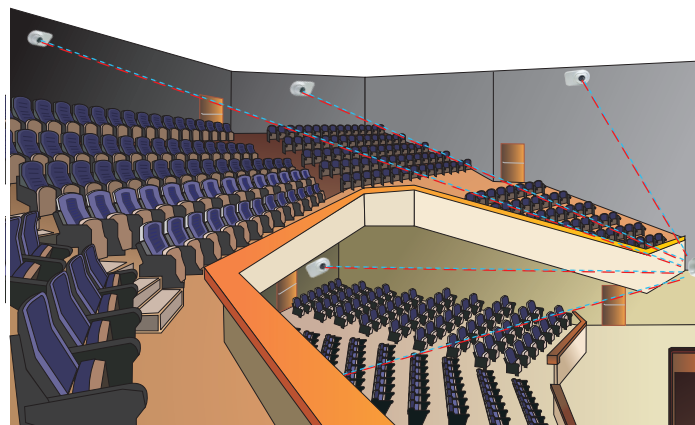

WHERE FLEXIBLE DETECTION COVERAGE IS NEEDED




OSID-DE can support up to 7 Emitters with a single Imager making it easy to deploy in unusually shaped areas. Emitters can be placed at different heights to overcome stratification and provide earlier detection. This Multi-Emitter 3D approach also provides a 50% better detection coverage because beams converging to one point are more closely spaced in the area.

UNIQUE DETECTION TECHNOLOGY

OSID-DE innovatively combines two technologies to reliably detect smoke in large, open spaces.

Dual-Wavelength Particle Detection


By using two wavelengths of light to detect particles, the system is able to distinguish between particle sizes. The shorter UV wavelength interacts strongly with both small and large particles, while the longer IR wavelength is affected predominantly by larger particles. Dual-wavelength path loss measurements therefore enable the detector to provide repeatable smoke obscuration values, while rejecting the presence of dust particles or solid intruding objects.

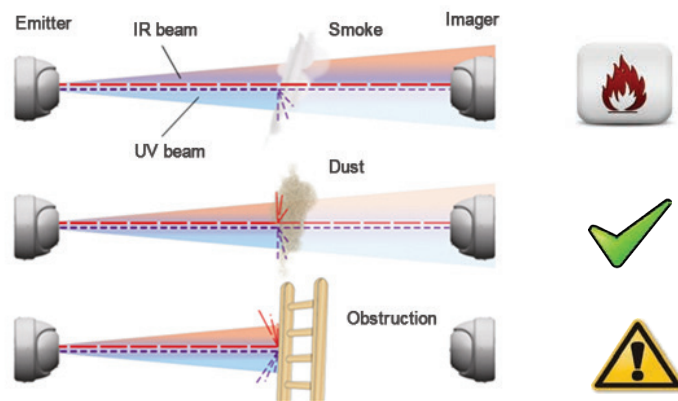

Optical Imaging with CMOS Imager Arrays

An optical imaging array in the OSID-DE detector provides a wider viewing angle to locate and capture images. Consequently, the system is easier to install and align and can compensate for drift caused by natural shifts in building structures.

Optical filtering, high-speed image acquisition, and intelligent software algorithms also enable the OSID-DE detector to process images and provide new levels of stability and sensitivity while providing high tolerance to high-level lighting variability.

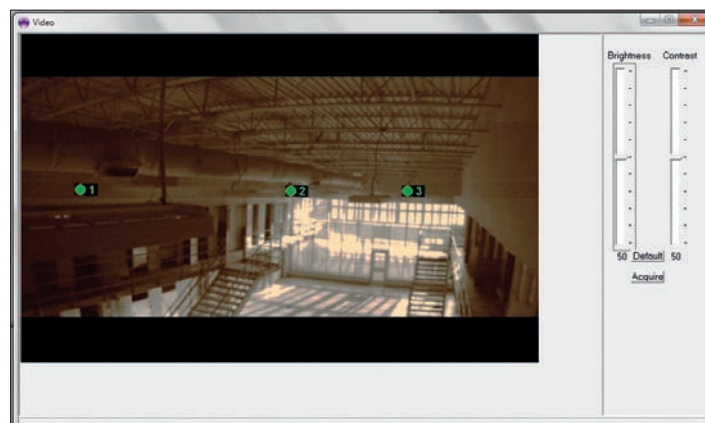

Actual view from the Imager indicating with icons the position of the various Emitters in its field of view

AWARD WINNING OSID-DE RANGE

Ordering Code	Description	Product Image
OSI-10	Imager 8° FOV Distance 30-150 m with OSE-SP-01/W. This configuration is for a 1 on 1 system. The OSI-10 is not suited to work with High Powered Emitters.	
OSI-90	Imager 80° FOV Distance 6-34 m with OSE-SP-01/W. Distance 12-68 m with OSE-HPW. Distance 12-50 m with OSE-HP-01. The OSI-90 can operate with up to 7 Emitters.	
OSE-SP-01	Emitter battery powered-alkaline battery Using battery powered Emitters drastically reduce the wiring and installation costs.	
OSE-HP-01	Emitter High Power battery powered-alkaline battery Using battery powered Emitters drastically reduce the wiring and installation costs.	
OSE-SPW	Emitter Wired 24 Vdc A preferred solution when 24 Vdc is close by.	
OSE-HPW	Emitter High Power Wired 24 Vdc Allows to double the detection ranges of the OSI- 90.	
OSID-INST	OSID-DE Installation Kit Kit including laser alignment tool, test filter, PC cable, cleaning cloth, reflectors and manual.	
OSP-001	FTDI Cable 1.5m Allows to connect a PC and hence OSID-DE Diagnostic SW to the Imager. The FTDI cable can be extended with another 20 m using cable with an active USB amplifier.	
OSP-002	Laser Alignment tool A unique alignment tool for fast alignment. Aligns and locks the eyeball. Does also activate Emitters when locked.	
OSID-WG	Wire Guard A steel cage to protect OSID-DE Imagers and Emitters from vandalism and accidental damage.	
OSID-EHI	Imager Environmental Housing Custom designed IP 66, NEMA 4-4X protective and environmental housings protect OSID-DE Imagers from dust and water ingress in industrial environments.	
OSID-EHE	Emitter Environmental Housing Custom designed IP 66, NEMA 4-4X protective and environmental housings protect OSID-DE Emitters from dust and water ingress in industrial environments.	

AWARD WINNING OSID-DE RANGE (CONTINUED)



Ordering Code	Description	Product Image
OSID-DE Diagnostic Tool	<p>Diagnostic software package</p> <p>A unique software program that allows visualisation of the Imager's view, quality of alignment and IR/UV real time graphs. The program also features real time logging capability (X/Y Emitter positioning, Emitter temperature and supply voltage) for trouble shooting and site evaluation purposes.</p>	
OSID-DE Selection Assistant	<p>System selection tool</p> <p>The program is an intuitive Excel based program that for a given area will calculate 90° and 10° OSID-DE solutions as well offer a price comparison with traditional beams. It also gives the exact location to point the alignment laser tool for optimal FOV for the Imagers in multi-Emitter solutions.</p>	
OSE-RBA	Emitter replacement battery Alkaline	
RTS151KEY	Imager Reset Station	
RTS151 KIT	Imager Reset Station	



AVAILABLE FIELDS OF VIEW AND DETECTION RANGES



Image Lens Type	Usable Field of View		Detection Range				Max. Number of Emitters
	Horizontal	Vertical	Standard Power		High Power		
			Min	Max	Min	Max	
10°	7°	4°	30 m (98 ft)	150 m (492 ft)	100 m (328 ft)	200 m (656 ft)/ 180 m (590 ft.)*	1
90°	80°	48°	6m (20 ft)	34 m (111 ft)**	12m (39 ft)	68 m (223 ft)/ 50 m (164 ft)***	7

* For UKCA and VdS compliant installations, use high power emitters with OSI-10 only up to 180 m (590 ft).

** Angular offset from Center Field of View for Imagers, refer to OSID-DE product Guide (Doc. No. 15204).


*** Range with OSE-HP-01.

OSID-DE DIAGNOSTIC SOFTWARE

OSID-DE Diagnostic is a unique tool in the industry that allows for live and off-line diagnostic information about the system and environment.

The tool operates under Windows on a standard laptop PC and offers, when connected in the field to the Imager, real time live visualisation of the normalised UV and IR values (0-100% obscuration), the UV and IR grey levels, the X-Y positioning of the 1-7 Emitters on the imager, reference levels and temperature.

The tools also allows for live and off-line evaluation of the imager's log files and reconstruct, with time and date stamp, any significant changes in the system. Log files can also be exported to an Excel file for quick analysis and review.

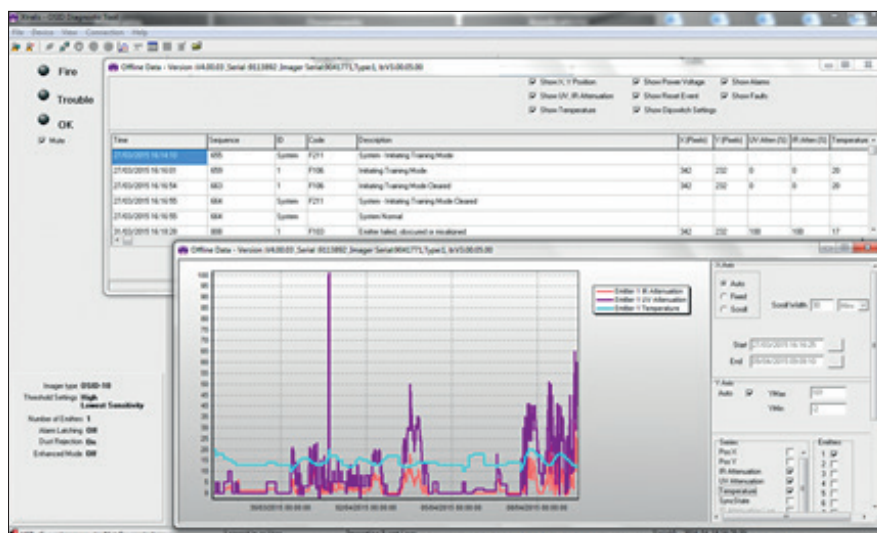



PRODUCT SPECIFICATIONS

General	
Alarm Thresholds (Configurable)	Low - Highest sensitivity / earliest alarm: 20% (0.97 dB) Medium - Medium sensitivity: 35% (1.87 dB) High - Low sensitivity: 50% (3.01 dB) Highest - Lowest sensitivity, Industrial Mode: 65% (4.56 dB) ¹ <i>Do not use Heater nor Dust Rejection if OSI-90 is set at 65% sensitivity.</i>
Alarm Latching (Configurable)	Latching / Non-latching configured via DIP switch
Status LEDs (Imager)	Red: Fire Alarm Bi-color Yellow/Green: Trouble / Power
IP Rating	IP 40 for Electronics; IP 66 for Optics Enclosure
DIP Switch Configuration (Termination Card)	Configuration for alarm thresholds, number of Emitters and alarm latching/non latching
Electrical	
Imager Supply Voltage	20-30 VDC (24 VDC nominal)
Imager Current Consumption	Nominal (at 24 VDC): <ul style="list-style-type: none">8mA (1 Emitter)10mA (7 Emitters) Peak (at 24 VDC) during training mode: 31mA
Emitter Supply Voltage	Wired versions: 20-30 VDC (24 VDC nominal) Battery versions: 1.9 - 3.2 VDC
Emitter Current Consumption	Wired Version (at 24 VDC): Standard Power: 350µA High Power: 800µA Battery Version (1.9 - 3.2 VDC)^{2,3}: OSE-RBA Built-in Battery: <ul style="list-style-type: none">SP Version: 5-year battery lifeHP Version: 3-year battery life <i>Note: Battery life time only valid for use at room temperature.</i>
Cable Gauge	0.2 - 4 mm ² (26-12 AWG)
Trouble/Fault Relay	2 A @ 30 VDC, NO-C-NC Dry Relay Contacts
Fire Alarm Relay	2 A @ 30 VDC, NO-C-NC Dry Relay Contacts
Heater Input Power	24 VDC, 16 mA (400 mW)
Environmental	
Operating Temperature	-10°C to 55°C (14°F to 131°F) ⁴
Humidity	10 to 95% RH Non-condensing
Mechanical	
Dimensions (WHD)	208 mm x 136 mm x 96 mm (8.2 in x 5.4 in x 3.8 in)
Weight	Imager: 610 g; Emitter (battery powered): 1.2 kg Emitter (wired): 535 g
Adjustment Angle	Horizontal: ±60°; Vertical: ±15°
Maximum Misalignment Angle	±2°

¹ Not approved for VdS/UKCA installations.

² Battery-powered Emitter is activated automatically when the alignment mechanism is in the locked position.

³ Trouble LED indicates that the planned battery end of life is approaching and a Trouble (Fault) is signaled to the IDC when the battery has been operating for 5 years. The Trouble LED is activated when the battery is 13 months from the expected end of life but no Trouble (Fault) is signaled to the IDC. Smoke detection continues to function while there is sufficient residual battery power. A failed battery cannot cause a false alarm.

⁴ Product UL listed for use from 0°C to 37.8°C (32°F to 100°F).

APPLICATIONS

- **Shopping Malls:** 3-D arrangement may be configured to protect many large, open spaces
- **Long Corridors:** Beam length up to 150 m (492 ft)
- **Airport Terminals and Train Stations:** Non-intrusive detection in a wide range of lighting conditions
- **Heritage Buildings:** Discreet and non-intrusive detection
- **Suspended Ceilings:** Discreet and flexible installation
- **Challenging Logistics:** Simple maintenance with no disruption to operations
- **Indoor Stadiums and Arenas:** Multi-layer detection
- **Dirty Environments:** Discriminates against dust, dirt and other intruding objects to reliably detect smoke
- **Hotel and Office:** Tower Atriums
- **Churches and Cathedrals**
- **Exhibition and Convention Centers**
- **Industrial and Manufacturing Facilities**



ABOUT XTRALIS



Xtralis is a leading global provider of powerful solutions for very early & reliable detection of smoke, fire, and gas threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised.

We protect highly-valuable and irreplaceable assets and infrastructure belonging to the world's top governments and businesses.

To learn more, please visit us at www.xtralis.com